



# The Americana Collection RGBW ADA Series

RGBW Color Tunable Wall Sconces — WiZ Pro Wi-Fi Enabled / ADA Compliant




Delphi (DP)

| SIZE      | 18  | 26  | 30  |
|-----------|-----|-----|-----|
| RED       | 9W  | 14W | 16W |
| GREEN     | 9W  | 14W | 16W |
| BLUE      | 9W  | 14W | 16W |
| 35K WHITE | 19W | 30W | 35W |

NOTE: Wattages shown are nominal.

## WiZ PRO COLOR TUNING APP

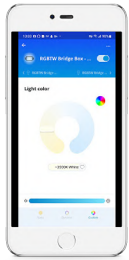

Louisville (LV)



Boston (BN)



### order example: RW-ADA-DP-26-UNV-BK

#### SERIES

Note: Refer to Cage Styles on Pg.2 for Style Code

RW-ADA-xx Americana RGBW ADA Series

– xx = Style Code

– Order Example: **RW-ADA-DP**

#### SIZE

Note: Depth Sizes Include Back Box

18 18" Tall x 8.25" Width x 4" Depth

26 26" Tall x 8.25" Width x 4" Depth

30 30" Tall x 8.25" Width x 4" Depth

#### VOLTAGE

UNV 120–277 Universal Volt Electronic Driver

#### STANDARD FINISH

BK Black

BZ Bronze

PA Painted Aluminum

SV Silver Grey

WHT White

#### PREMIUM UPCHARGE FINISH

CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))

– Provide RAL# or Make-to-Match Color Chip

+NAT Epoxy Coating for Natatorium

– Includes Conformal Coating for LEDs

#### DIFFUSER OPTIONS

CB Clear Bottom

CT Clear Top

CTB Clear Top & Bottom

OB Open Bottom (Indoor Only)

OQB Opaque Bottom (No Downlight)

OQT Opaque Top (No Uplight)

OQTB Opaque Top & Bottom (No Up/Down Light)

#### ACCESSORY OPTIONS (Order as a Separate Line)

REMT0030 Remote for WiZ WiFi Control System

Catalog Number

Project Name & Location

Type

### Product Specifications

**BACKPLATE:** 16 Ga. aluminum (AL).

**CAGE:** Square extruded aluminum bars permanently secured by hidden means to the frame.

**DIFFUSER:** White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8").

**DRIVER:** Universal voltage input, 120/277V electronic driver.

**FASTENERS:** Stainless steel tamperproof screws —(2) To secure cage/frame in place.

**FINISH:** Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.

**GASKETING:** High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against

dust, moisture & outside contaminants.


**LIGHT ENGINE:** RGBW LED Color tuning system - Linear Light Engines.

**MOUNTING:** Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor. 7/8" KO in Center for Wire Access.

**SOFTWARE:** WiZ Pro WiFi Control App (Android / IOS / Cloud)


**COMPLIANCE:** Built to comply with U.S. and Canadian safety standards. Suitable for wet locations. ADA Compliant.

## ROUND DIFFUSER

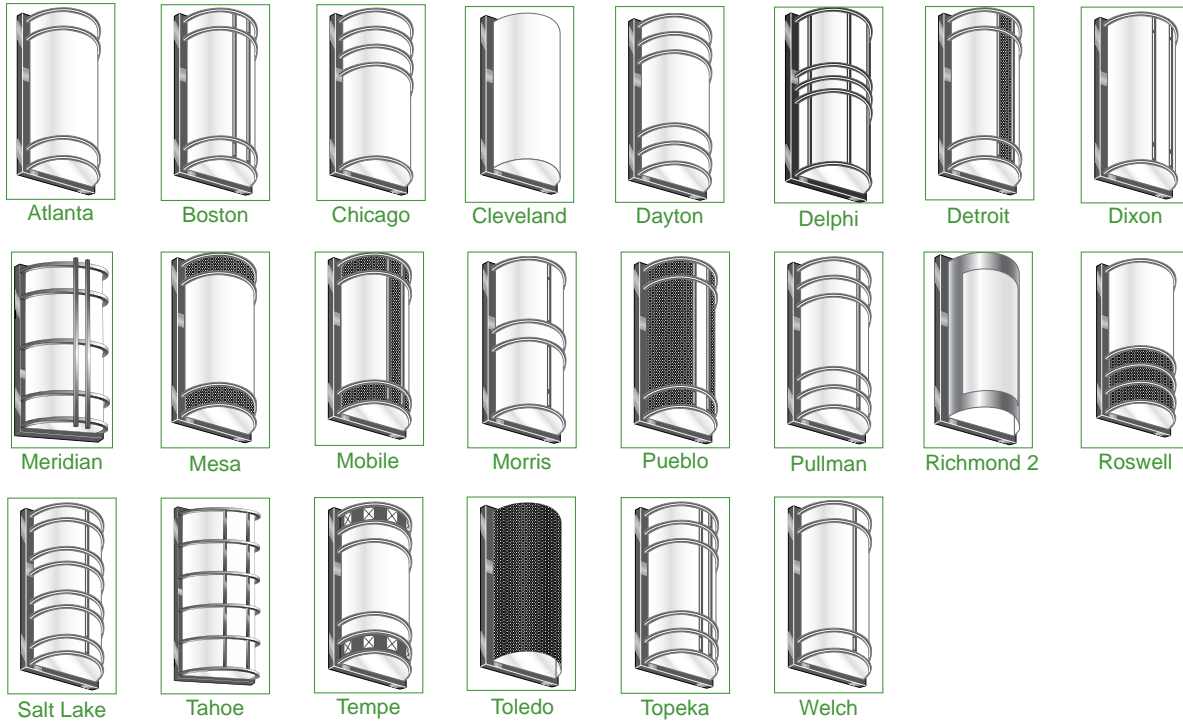


| ROUND       |            |
|-------------|------------|
| Atlanta     | RW-ADA-AL  |
| Boston      | RW-ADA-BN  |
| Chicago     | RW-ADA-CH  |
| Cleveland   | RW-ADA-CD  |
| Dayton      | RW-ADA-DN  |
| Delphi      | RW-ADA-DP  |
| Detroit     | RW-ADA-DT  |
| Dixon       | RW-ADA-DI  |
| Meridian    | RW-ADA-MER |
| Mesa        | RW-ADA-ME  |
| Mobile      | RW-ADA-MB  |
| Morris      | RW-ADA-MO  |
| Pueblo      | RW-ADA-PB  |
| Pullman     | RW-ADA-PL  |
| Richmond 2  | RW-ADA-RD2 |
| Roswell     | RW-ADA-RO  |
| Salt Lake   | RW-ADA-SL  |
| Tahoe       | RW-ADA-TH  |
| Tempe       | RW-ADA-TE  |
| Toledo      | RW-ADA-TO  |
| Topeka      | RW-ADA-TK  |
| Welch       | RW-ADA-WE  |
| SQUARE      |            |
| Berkeley    | RW-ADA-BL  |
| Champaign   | RW-ADA-CA  |
| Dallas      | RW-ADA-DA  |
| Hilo        | RW-ADA-HI  |
| Louisville  | RW-ADA-LV  |
| Maui        | RW-ADA-MA  |
| Springfield | RW-ADA-SF  |
| TRIANGLE    |            |
| Artesia     | RW-ADA-AE  |
| Carmi       | RW-ADA-CR  |
| Carmi 2     | RW-ADA-CR2 |
| Greenfield  | RW-ADA-GN  |
| Houston     | RW-ADA-HN  |
| New York    | RW-ADA-NY  |
| Quincy      | RW-ADA-QN  |

## SQUARE DIFFUSER

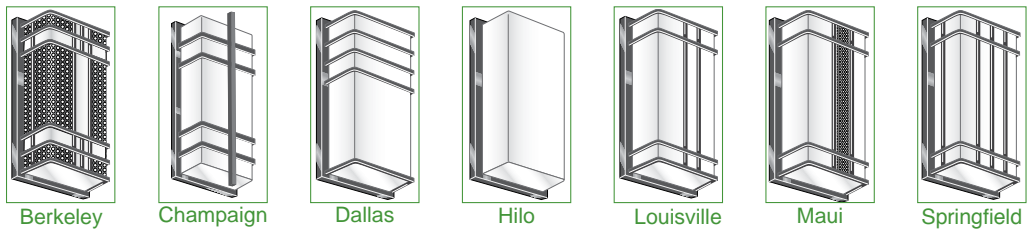

## TRIANGULAR DIFFUSER

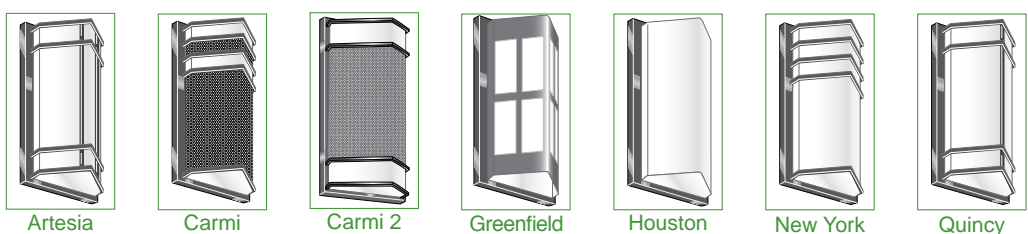

The Americana RGBW ADA Series features color tuning light engines which can be controlled via the **iOS or Android WiZ Pro app**. Various modes allow the user to adjust the brightness of the illumination at a neutral white color temperature or the color hue in any combination of RGB with a possible 16 million color settings.

The ability to customize your lighting gives the user the flexibility to personalize their illumination scheme according to their desired configuration which is applicable for holidays, themed events, location specific environments, and many more applications.

